

## Stabilizer Bar TYPE DS


Specifically formulated to extend runtime on downhole pumps, sinkerbars and tubing.

US Rod DS stabilizer bars are manufactured from the same proven AISI-4320M alloy steel as our full-length DS sucker rods. Using the same high-quality standards as our other US Rod products, these stabilizer bars will help to extend the life of your downhole pump, sinkerbars and tubing.

US Rod Stabilizer Bars are recommended to centralize your pump plunger during the downstroke, reducing drag and lowering the chance of premature wear on pump parts and tubing. US Rod Stabilizer bars can also reduce buckling tendencies, improving your downhole pump efficiency and resulting in more production. Available in 30 in or 48 in lengths with one Bullet EX guide (30 in) or 3 Bullet EX guides (48 in). Other rod guide designs available upon request.



*The 30" type DS Stabilizer Bar*

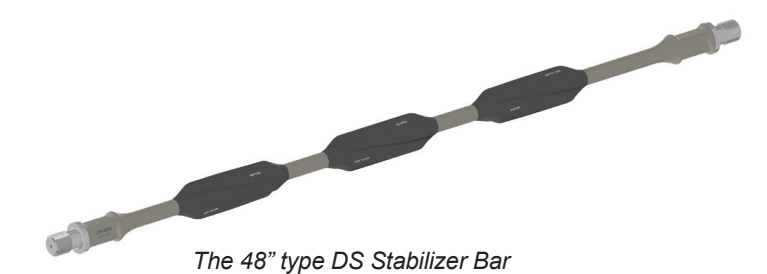

*The 48" type DS Stabilizer Bar*

Tube Size	2 in	2-7/8 in	3 in
Rod guide type	Bullet EX	Bullet EX	Bullet EX
Rod guide material	PPA, PPS, PPS-Max	PPA, PPS, PPS-Max	PPA, PPS, PPS-Max
Rod diameter	1", 7/8"	1", 7/8"	1", 7/8"
Pin size	3/4", 7/8"	3/4", 7/8"	3/4", 7/8"

★  
US Rod Manufacturing is the only privately owned and operated Sucker Rod manufacturing plant in the USA.



[www.USRodCo.com](http://www.USRodCo.com)

Office Headquarters  
PO Box 54679  
Oklahoma City, OK 73154  
(405) 838-1544

Manufacturing Plant  
502 South Oakland Ave  
Nappanee, IN 46550  
(574) 227-1288